

SX-2000

Digital Cinema Server with Integrated Media Block

The stunning solution for both 2K and 4K digital cinema



SX-2000 Digital Cinema Server



Integrated Media Block

“ SX-2000 Digital Cinema Server with Integrated Media Block, GDC Technology’s fifth generation digital cinema playback server is fully complied with DCI specifications.

The SX-2000 can support both 2K and 4K resolutions based on Texas Instrument’s Enhanced DLP Cinema® technology, retaining all of the attractive SA-2100A’s features. ”

SX-2000 Digital Cinema Server with Integrated Media Block (IMB)

The stunning solution for both 2K and 4K digital cinema



GDC SX-2000 with IMB achieves DCI compliance !

Unique Features

Supports Barco, Christie and NEC Series 2 Projectors

The SX-2000 seamlessly integrates with all Series 2 projectors including Barco, Christie and NEC to ensure highly reliable and secure content delivery.

Live 3D Support (Optional)

The SX-2000 comes integrated with 3D Demuxing[#] (side-by-side) which makes receiving high-quality 3D broadcasts possible. It also provides a built-in integrated 3D receiver-decoder to seamlessly support 3D Live broadcast without requiring additional receiver-decoder.

Supports All Approved 3D Systems

The SX-2000 seamlessly integrates with numerous studio-approved 3D systems such as RealD, MasterImage, Dolby 3D and active 3D systems.



Up to 4TB of Redundant Hot Swappable Storage (Optional)

The SX-2000 comes with 3 hot swappable data drives that can easily be attached or detached.

The SX-2000 is able to remain operational in the event of a single drive failure, thereby minimizing downtime.



Instant Playback from CRU Drive Sleds*

The SX-2000 allows for instant playback from the CRU drive sleds without requiring content ingest, which reduces time to screening in emergency situations.

Finest 3D Playback

The SX-2000 provides the highest quality 3D playback with 12-bit 4:4:4 output images (left and right), providing 500 times more color spectrum than legacy servers.

USB 3.0 Interface (Optional)

The SX-2000 features an optional USB 3.0 interface that increases content ingest speed by approximately 2 times faster than a USB 2.0 interface.

Supports Closed Captioning Devices

The SX-2000 supports various closed captioning devices such as USL Closed Captioning Device and WGBH Rear Window Captioning Device to enhance the hearing or visual impaired cinema patron's movie-going experience.



Instant Playback from TMS Media Library[#]

The SX-2000 allows for instant playback from the Theatre Management System's (TMS) content library to the server, providing greater flexibility for show management.



Remote Access of the Screen Management System

Cinema operators can remotely access GDC servers using Theatre Management System (TMS) and Screen Management System (SMS) from a Windows[®] PC, or mobile devices such as the Apple[®] iPhone[™].

SX-2000 Digital Cinema Server Technical Specifications

Physical

Dimensions 482(W) x 616 (D) x 177 (H) mm 4RU
Weight 25kg (55lbs)

Environmental

Operating temperature 5°C to 40°C (41°F to 104°F)
Operating humidity 20% to 90%, non-condensing
Operating altitude 10,000 ft. above sea level

Power

Power requirement 100 to 240V, 60 to 50Hz, 6 to 3A
Max power consumption 320W
Redundant power supplies Redundant internal hot swappable x 2
Uninterrupted power supply 3-way, meets IEEE STD 587 Cat. A 6KV test (UPS) with surge protection (optional)

Video Specifications

JPEG 2000 4096 x 2160 - 24 (2D) (optional)
2048 x 1080 - 24 (2D), 24 (3D), 48 (2D)*
MPEG 2/MPEG 4 SD/HD
Packaging SMPTE Digital Cinema Package (DCP), Interop DCP, DSR*

Audio Output

Digital uncompressed audio 16/24-bit AES/EBU,
16 channels, 48/96 KHz
D-sub 25-pin
Audio Offset +/- 500 frames

System Interfaces

Ethernet 2 x RJ-45 (1x10/100 BaseT, 1 x 1000 BaseT)
USB 2.0 6 x USB A-Type Female
USB 3.0 (optional) 2 x USB A-Type Female
8-port GPI/Os D-sub 25-pin (16-port GPI/Os is optional)
DVD-ROM drive* Read speed 8x
CRU sled* CRU-Dataport
DVB-ASI (optional) BNC, CENELEC EN 50083-9 standard
270Mbps
RS232 D-sub 9-pin
Modem Interface with remote access software

Storage

Redundant hot swappable 2000GB
(Upgradable to 4000GB)

Security

AES 128-bit encrypted data storage
Civolution (Thomson NexGuard*) forensic watermarking
FIPS 140-2 Level 3
DCI

Subtitles

Subtitle overlay on server
Projector Cinecanvas support

Reference Input

Analog Genlock

User Interface

External Panel Control (optional) Integrated control of digital cinema servers and DLP Cinema® Projectors

Windows® PC network control Remote access to the screen management system (SMS) and server user interface

Language Versions

English / Simplified Chinese / Traditional Chinese / Korean / Japanese / Spanish / French

Third-party Integration Options

TMS GDC, Third-party*
3D system RealD, Dolby 3D, MasterImage, active systems
4D system D-Box Motion Code™, 4D plex
Closed Captioning Device USL
WGBH (Rear Window Captioning Device)

Integrated 3D Live Specifications

Video MPEG 2/ MPEG 4
Audio Dolby Digital (AC-3)* / MPEG 2 audio
3D Demuxing Side by side / Third-party#
Stream Format UDP Multicast of MPEG 2 Transport Stream

* Only available in SX-2000A

* Supports Dolby Digital (AC-3) in pass-through mode only, which requires external AC-3 decoder or sound processor for integration

* 2D playback at 48fps requires updated projector software

* Please check with your TMS provider


RealD LIVE and SENSIO® Hi-Fi 3D Live support available

Subject to network stability and bandwidth limitation

SX-2000 Series Digital Cinema Server

The SX-2000 Digital Cinema Server is available in various configurations to suit the differing needs of cinema owners. Cinemas that already utilize a theatre management system (TMS) will find the SX-2000T a cost efficient choice. Meanwhile, cinemas not using TMS can benefit from the increased ingest options available in the SX-2000A.


Model No.	SX-2000A	SX-2000T
Description	Advanced Model	Advanced Model for TMS Integration
DVD-ROM Drive	•	
CRU Sled	•	
Redundant Power Supply	•	•
GPI/O	•	•
Hot-swappable HDD x 3 units	•	•

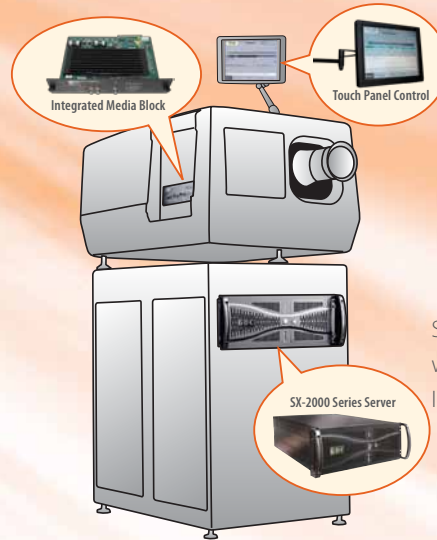


Series 2 DLP Cinema® projector with SX-2000 Series server and Integrated Media Block

SX-2000 Series Digital Cinema Server Technical Drawings


Front View



Side View

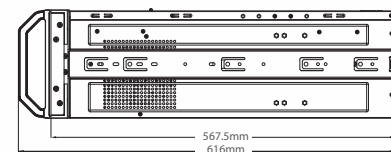

Back View



GDC Technology Offices

USA (Los Angeles, CA)

1016 West Magnolia Boulevard
Burbank, CA 91506, USA
Tel : +1 818 972 4370 /
+1 877 743 2872 (Toll Free)
Fax : +1 877 643 2872

USA (Sterling, VA)

21155 Whitfield Place, Suite 207,
Sterling, VA 20165, USA
Tel : +1 877 337 0868 (Toll Free)
Fax : +1 571 313 0468

Spain (Barcelona)

Av. Diagonal, 177, 9th Floor
08018 Barcelona, Spain
Tel : +34 93 238 14 10
Fax : +34 93 309 31 88

Hong Kong

Unit 1-7, 20th Floor,
Kodak House II,
39 Healthy Street East,
North Point, Hong Kong
Tel : +852 2523 6851
Fax : +852 2579 1131

Japan (Tokyo)

7F Nishino Kinryo Bldg,
4-9-4, Hatchobori, Chuo-ku
Tokyo 104-0032, Japan
Tel : +81 3 3523 2650
Fax : +81 3 3523 2651

Singapore

6 Changi South Street 2,
Fedex Building, Level 7,
Singapore 486349
Tel : +65 6222 1082
Fax : +65 6222 1089

China (Shenzhen)

5th Floor GDC Building,
No.9 Hi-tech Middle 3 Road,
Science & Technology Park,
Nanshan District,
Shenzhen, P.R. China 518057
Tel : +86 755 8608 6000
Fax : +86 755 8608 8098

China (Beijing)

Rm. 609-618, Office Building,
20# Xinde Street,
Xicheng District,
Beijing, P.R. China 100088
Tel : +86 10 6205 7040
Fax : +86 10 6205 7054

Email : info@gdc-tech.com
Website : www.gdc-tech.com



GDC Tech manufacturing facility is ISO 9001 : 2008 certified.

Copyright © 2012 GDC Technology Limited. All rights reserved. All trademarks listed in this brochure are properties of their respective owners. Specifications are subject to change without notice due to ongoing product development and improvement.

China Regional Technical Support

Changsha (长沙)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 10 6205 7054

Chengdu (成都)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 10 6205 7054

Chongqing (重庆)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 23 6311 8005

Guangzhou (广州)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 20 8329 9144

Shanghai (上海)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 21 6073 1256

Wuhan (武汉)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 10 6205 7054