

SIEMENS



Transducers

ACUSON S2000™ Ultrasound System

Release 3.1

TABLE OF CONTENTS

7CF2 Transducer.....	3	4V1c Transducer.....	8
6C2 Transducer.....	3	18L6 HD Transducer.....	9
6C1 HD Transducer.....	4	14L5 SP Transducer.....	9
4C1 Transducer.....	4	14L5 Transducer.....	10
9EVF4 Transducer.....	5	9L4 Transducer.....	10
EC9-4 Transducer.....	5	V7M Transducer.....	11
EV-8C4 Transducer.....	6	V5Ms Transducer.....	11
4P1 Transducer.....	6	CW5 Transducer.....	12
10V4 Transducer.....	7	CW2 Transducer.....	12
8V3 Transducer.....	7	AcuNav 8F.....	13
4V1 Transducer.....	8	AcuNav 10F.....	13



7CF2 Transducer

Frequency Bandwidth:	2 – 7 MHz
Exam Types:	Abdomen, Fetal Echo, OB/GYN, Pelvis, Renal

Design Attributes:

- Lightweight transducer with flexible cable
- Ergonomically designed form factor
- User-selectable MultiHertz™ multiple frequency imaging
- Wide bandwidth curved array volume transducer



6C2 Transducer

Frequency Bandwidth:	2 – 6 MHz
Exam Types:	Abdomen, Fetal Echo, OB/GYN, Pediatric Abdomen, Pelvis, Peripheral Vascular Arterial, Peripheral Vascular Venous, Renal

Design Attributes:

- Curved Vector™ wide-view imaging format
- Hanafy lens transducer technology
- Ergonomically designed form factor
- User-selectable MultiHertz imaging



6C1 HD Transducer

Frequency Bandwidth:	1.5 – 6.0 MHz
Exam Types:	Abdomen, Fetal Echo, OB/GYN, Pelvis, Renal

Design Attributes:

- Curved Vector imaging format
- Hanafy lens transducer technology
- User-selectable MultiHertz imaging
- Ergonomic design with ElastoGrip™ ergonomic grip coating



4C1 Transducer

Frequency Bandwidth:	1 – 4.5 MHz
Exam Types:	Abdomen, Fetal Echo, OB/GYN, Pelvis, Renal

Design Attributes:

- Curved Vector imaging format
- Hanafy lens transducer technology
- User-selectable MultiHertz imaging



9EVF4 Transducer

Frequency Bandwidth:	4 – 9 MHz
Exam Types:	Fetal Echo, Neonatal Head, OB/GYN

Design Attributes:

- Wide bandwidth endovaginal volume transducer
- Lightweight transducer with flexible cable
- User-selectable MultiHertz imaging



EC9-4 Transducer

Frequency Bandwidth:	3.75 – 9 MHz
Exam Types:	Neonatal Head, OB/GYN, Prostate

Design Attributes:

- Ergonomically designed form factor
- Lightweight transducer with flexible cable
- User-selectable MultiHertz imaging
- Harmonic compounding
- Curved array format



EV-8C4 Transducer

Frequency Bandwidth: 4 – 9 MHz

Exam types: Endovaginal Gynecology, Endovaginal Obstetrics

Design Attributes:

- Tightly curved format
- Wide field of view
- User-selectable MultiHertz imaging
- Harmonic compounding



4P1 Transducer

Frequency Bandwidth: 1 – 4.5 MHz

Exam Types: Abdomen, Adult Echo, Fetal Echo, OB/GYN, Pediatric Echo, Pelvis, Renal, Transcranial

Design Attributes:

- Multi-D™ matrix array transducer
- Ergonomically designed form factor
- Lightweight transducer with flexible cable
- User-selectable MultiHertz imaging
- Vector™ imaging format



10V4 Transducer

Frequency Bandwidth: 4 – 10 MHz

Exam Types: Neonatal Echo, Neonatal Head, Pediatric Abdomen, Pediatric Echo, Pelvis, Renal

Design Attributes:

- Vector imaging format
- User-selectable MultiHertz imaging



8V3 Transducer

Frequency Bandwidth: 2.5 – 8 MHz

Exam Types: Fetal Echo, Neonatal Echo, Neonatal Head, Pediatric Abdomen, Pediatric Echo

Design Attributes:

- Hanafy lens transducer technology
- Vector imaging format
- User-selectable MultiHertz imaging



4V1 Transducer

Frequency Bandwidth:	1 – 4.5 MHz
Exam Types:	Abdomen, Fetal Echo, OB/GYN, Pelvis, Renal

Design Attributes:

- Hanafy lens transducer technology
- User-selectable MultiHertz imaging
- Harmonic compounding
- Vector imaging format




4V1c Transducer

Frequency Bandwidth:	1 – 4.5 MHz
Exam Types:	Abdomen, Adult Echo, Pediatric Echo, Renal, Transcranial

Design Attributes:

- Hanafy lens transducer technology
- Sector imaging format
- User-selectable MultiHertz imaging
- RF shielding

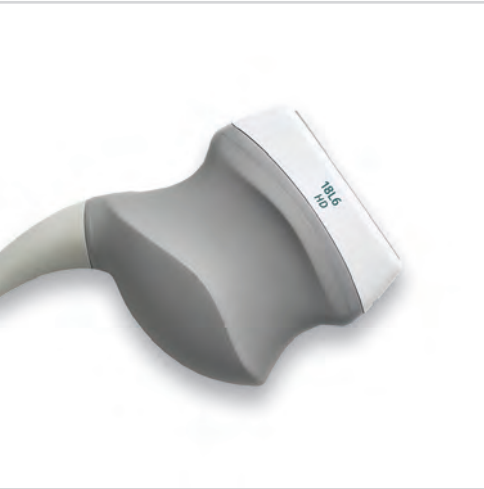

18L6 HD Transducer

Frequency Bandwidth:	5.5 – 18 MHz
Exam Types:	Breast, Cerebrovascular, Digital, Musculoskeletal, Penile, Peripheral Vascular, Testicle, Thyroid

Design Attributes:

- Hanafy lens transducer technology
- Ergonomic design with Elastogrip ergonomic grip coating
- Extra-long cable (2.1 m) for ease of use
- User-selectable MultiHertz imaging



14L5 SP Transducer

Frequency Bandwidth:	5 – 14 MHz
Exam Types:	Breast, Cerebrovascular, Digital, High Framerate, Penile, Intraoperative Abdomen, Intraoperative Vascular, Musculoskeletal, Testicle, Thyroid

Design Attributes:

- Lightweight transducer with flexible cable
- Ergonomically designed form factor
- Virtual format imaging
- Sterilizable high resolution linear array for special applications
- User-selectable MultiHertz imaging



14L5 Transducer

Frequency Bandwidth:	5 – 14 MHz
Exam Types:	Breast, Cerebrovascular, Digital, Musculoskeletal, Penile, Peripheral Vascular, Testicle, Thyroid

Design Attributes:

- Multi-D matrix transducer
- Ergonomically designed form factor
- Lightweight transducer with flexible cable
- Virtual format imaging
- User-selectable MultiHertz imaging



9L4 Transducer

Frequency Bandwidth:	4 – 9 MHz
Exam Types:	Breast, Cerebrovascular, Digital, Fetal Echo, Musculoskeletal, OB/GYN, Pediatric Abdomen, Pediatric Hip, Pelvis, Penile, Peripheral Vascular, Testicle, Thyroid

Design Attributes:

- Multi-D matrix transducer
- Ergonomically designed form factor
- Lightweight transducer with flexible cable
- User-selectable MultiHertz imaging
- Harmonic compounding



V7M Transducer

Frequency Bandwidth:	4.0 – 8.0 MHz
Exam Types:	Pediatric and Adult Transesophageal Echo

Design Attributes:

- Endoscope diameter = 7.0 mm; length = 70 cm
- Small tip size for increased patient comfort: width = 10.9 mm, thickness = 8.0 mm, circumference = 22 mm
- Ergonomic design featuring one-hand control
- Manual rotation: -10° – 190°
- Vector imaging format phased array
- User-selectable wideband MultiHertz imaging
- DTI™ Doppler tissue imaging capability



V5Ms Transducer

Frequency Bandwidth:	3 – 7 MHz
Exam Types:	Transesophageal Echo

Design Attributes:

- Endoscope diameter = 10.5 mm, length = 110 cm
- Adult tip size: width = 14.5 mm, height = 11.5 mm
- Ergonomic design featuring one-hand control with variable speed rotation: 90° per sec
- RF shielding
- User-selectable MultiHertz imaging



CW5 Transducer

Selectable CW Doppler Frequencies:	5 MHz
Exam Types:	Adult Echo, Cerebrovascular, Neonatal Echo, Peripheral Vascular, Pediatric Echo, Transcranial



CW2 Transducer

Selectable CW Doppler Frequencies:	2 MHz
Exam Types:	Adult Echo, Cerebrovascular, Neonatal Echo, Pediatric Echo, Peripheral Vascular, Transcranial



AcuNav 8F⁺

Frequency Bandwidth:	4.0 – 10.0 MHz
-----------------------------	----------------

Applications:	Adult intracardiac echocardiography
----------------------	-------------------------------------

Design Attributes:

- 8 french catheter (2.7 mm diameter)
- 90 cm insertable length
- Sterile, single-use advanced miniaturization ACUSON AcuNav™ ultrasound catheter family
- Reusable SwiftLink™ catheter connector
- Four-way steering in two planes: 160° in each direction
- Longitudinal side-fire imaging
- Vector imaging format
- DTI capability

Requires cardiac package.



AcuNav 10F⁺

Frequency Bandwidth:	4.0 – 10.0 MHz
-----------------------------	----------------

Applications:	Adult intracardiac echocardiography
----------------------	-------------------------------------

Design Attributes:

- 10 french catheter (3.3 mm diameter)
- 90 cm insertable length
- Sterile, single-use advanced miniaturization ACUSON AcuNav ultrasound catheter family
- Reusable SwiftLink catheter connector
- Four-way steering in two planes: 160° in each direction
- Longitudinal side-fire imaging
- Vector imaging format
- DTI capability

Requires cardiac package.

⁺ For purchase or inquires, contact Biosense Webster: USA (909-839-8500 and 800-729-9010), Belgium +32-2-352-1411, Asia Pacific +(65) 6827-6100.

[†] SwiftLink adaptor supports both the ACUSON AcuNav 8F and 10F catheters.

Frequency Bandwidth measurements
represent bandwidth at ± 20 dB.

AcuNav, ACUSON P50, ACUSON S1000,
ACUSON S2000, ACUSON S3000, ACUSON
X300, ACUSON X500, Antares, Aspen,
CV70, Cypress, DTI, ElastoGrip, G60 S,
Multi-D, MultiHertz, Sequoia, SwiftLink
and Vector are trademarks of Siemens
Medical Solutions USA, Inc.

DS 1212 | © 12.2012, Siemens Medical
Solutions USA, Inc.

Global Siemens Headquarters

Siemens AG
Wittelsbacherplatz 2
80333 Muenchen
Germany

**Global Siemens Healthcare
Headquarters**

Siemens AG
Healthcare Sector
Henkestrasse 127
91052 Erlangen
Telephone: +49 9131 84-0
Germany

www.siemens.com/healthcare

Legal Manufacturer

Siemens Medical Solutions USA, Inc.
Ultrasound
685 East Middlefield Road
Mountain View, CA 94043
USA
Telephone: 1-888-826-9702
www.siemens.com/ultrasound