


innovate... laminate

Introducing the new Easymount™ range with heated top roller for superb results everytime

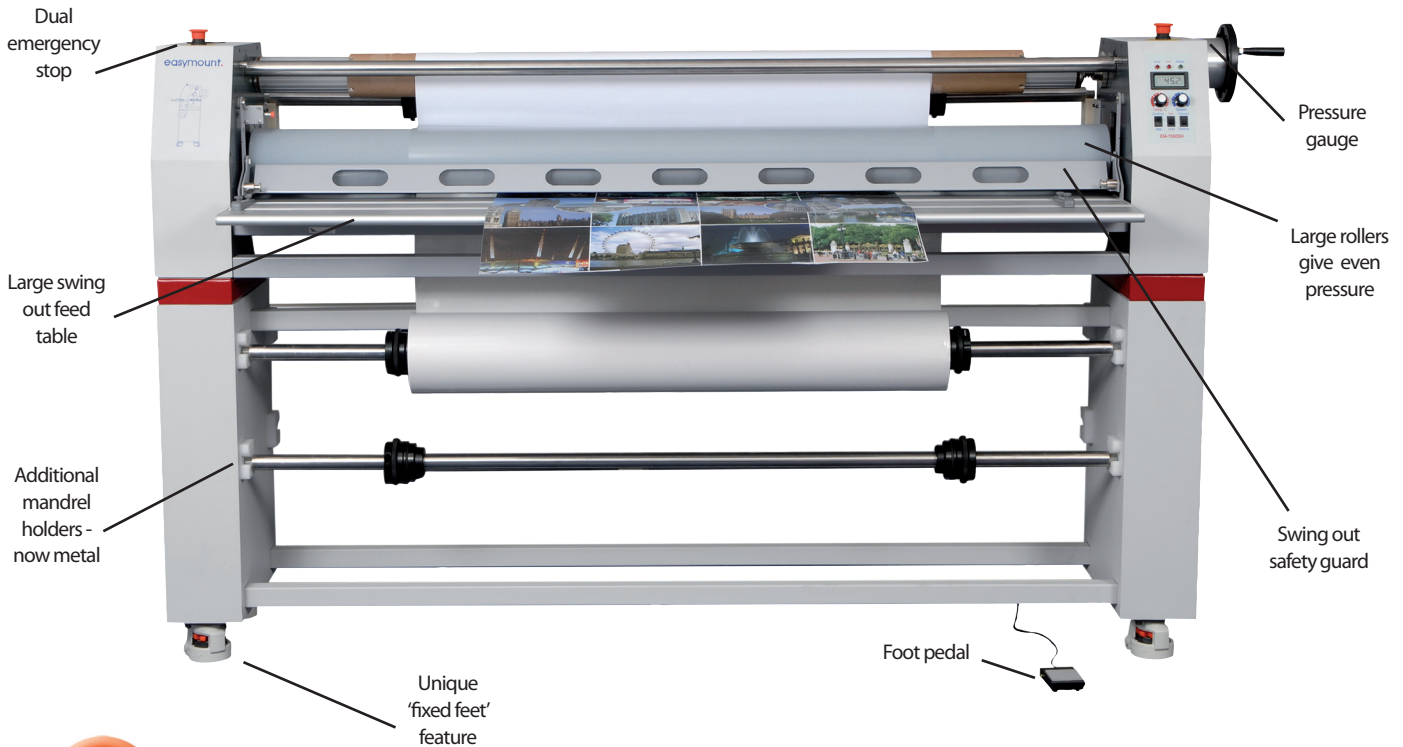

Easymount EM-1600 SH

Design

The new Easymount™ combines style with functionality. The design has been enhanced and more features have been added. This professional range sets new standards of excellence.

Performance

The three models in the range include 1200, 1400 and 1600mm widths, all of which are capable of producing up to 3 metres per minute - 50% faster than before!

Enhancements

The range now features additional mandrel holders for storing spare rolls of film, a swing out feed tray for hassle free loading and a pressure gauge on the rollers to give perfect results every time.

IDEALLY SUITED FOR

- cold laminates
- mounting prints to boards
- applying vinyls
- application tapes
- applying adhesive films

and many more...

GREAT FOR USE IN

- commercial printers
- copy and print shops
- exhibition graphics
- reprographics bureau
- sign makers

EASYMOUNT™ SH

EM-1200 SH / EM-1400 SH / EM-1600 SH

FEATURES

- hot & cold mounting and laminating
- solid construction heavy-duty system
- mount & laminate simultaneously
- single hot adjustable roller
- take up mandrel for release liner paper
- variable speed control
- large silicon rollers for even pressure
- reverse mechanism and foot pedal
- low maintenance
- magic eye safety feature

NEW FEATURES

- 50% faster - now up to 3m per minute
- extra mandrels to hold spare rolls of film which saves time when changing rolls
- adjustable castors for levelling on an uneven floor
- bigger feed tray to assist prints feeds
- swing out feed tray and safety guard making mounting onto board and loading the film quicker and hassle free
- pressure gauge on rollers, adjustable on machine to give perfect pressure every time



Easymount EM-1200 SH

NEW improved feature!

Recessed sturdy metal mandrel holders - giving you more space to store even larger rolls



specifications	EM-1200 SH	EM-1400 SH	EM-1600 SH
approx laminating speed (m/min)	3	3	3
maximum width (mm)	1200 (47")	1400 (55")	1600 (62")
mounting thickness (mm)	25	25	25
roller diameter (mm)	110	120	130
warm-up time (mins)	10	10	10
hot roller heater system	internal infrared	internal infrared	internal infrared
laminating temperature (°C)	0-60	0-60	0-60
speed/temp control	dial keypad	dial keypad	dial keypad
pressure adjustment	manual (with guide)	manual (with guide)	manual (with guide)
film core (mm)	75	75	75
power supply AC (V-Hz)	220/240-50-60	220/240-50-60	220/240-50-60
power consumption (W)	970	1310	1500
dimensions (mm)	1790 x 648 x 1248	1990 x 648 x 1248	2190 x 648 x 2157
weight (Kg)	178	189	217
warranty (year)	1	1	1



For more information please contact;
Andy Francis
 Tel: 023 8023 2444
 Mob: 07866 428085
 Email: andy@condoroffice.co.uk
 Visit: www.condoroffice.co.uk

Condor Office Solutions
 118 - 120 Lodge Road
 Southampton
 Hampshire
 SO14 6QS