


World Leader • In-Rack • Audio & Video Monitoring

WOHLER AMP1-DA

Compact, High Quality, 2 Channel, Analog & AES/EBU Self-Powered Speaker System

January 15, 2004

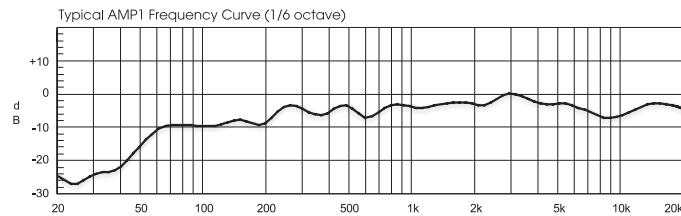

Features:

- Full Fidelity Audio Monitoring in only 1U of rack space
- 2 Unbalanced AES/EBU Digital Inputs (Select 1)
- 2 Balanced Analog Inputs (1 Stereo)
- Balanced Analog Output of Selected Digital Source
- Powerful 98dB SPL at 2 feet (0.6m)
- Two 26 Segment Tri-Color Level Meters Displaying Simultaneous VU & PPM
- Premium Quality Drivers & Power Amplifiers
- Extended Frequency Response and Low Distortion
- Focused Sound, Reduces Adjacent Bay Crosstalk
- Audible Indication of Phase/Polarity Problems
- Innovative LED Display of Phase/Polarity Relationships
- Thorough Magnetic Shielding for Placement next to Video Monitors
- Headphone Jack, Mutes Speakers
- Blowout Proof Speakers
- Quick and Simple Installation

The AMP1-DA provides self-powered, full-fidelity stereo audio monitoring of 2 channels from Analog and AES/EBU Digital sources in the smallest rack space possible. This unit contains four high performance transducers driven by three power amplifiers: one amplifier/driver combination handles midrange and high frequency information in stereo, while the second handles summed low frequency information below the 500 Hz crossover point.

The AMP1-DA features two 26 segment LED level meters showing simultaneous VU & PPM for accurate level-metering. The front panel features an innovative LED Display of Phase/Polarity Relationships. Output limiter circuits are incorporated to protect the speakers, and extensive magnetic shielding allows placement immediately adjacent to video monitors with no color impurities.

The unique design provides optimally focused sound for operators in an Ultra Near Field (1 to 3 ft.) working environment and offers performance comparable to that of many separate monitor pairs, yet does so without the installation hassles, awkward speaker placements and "added-on" look. This provides for a higher SPL for the operator while reducing overall ambient sound and adjacent bay crosstalk. Extended HF response reveals potential problems with audio whine or hiss and electronic rather than acoustic cancellation of bass frequencies provides positive audible detection of out-of-phase (reversed polarity) audio feeds. A headphone jack is provided on the front panel, usage automatically mutes the speakers.

The AMP1-DA is ideally suited for use in VTR bays, mobile production vehicles, teleconferencing installations, multimedia systems, satellite link and cable TV facilities, and on-air radio studios. Built and rigorously tested in the USA, the AMP1-DA is backed by a strong warranty and a "Satisfaction Guaranteed" return policy.



Audio Monitoring

Level Metering

Alarm Systems

Video Monitoring


Toll Free (US): 1-888-5-WOHLER Tel: (650) 589-5676 Fax: (650) 589-1355 • 713 Grandview Drive, South San Francisco, California 94080, USA

www.wohler.com sales@wohler.com


WOHLER AMP1-DA

Compact, High Quality, 2 Channel, Analog & AES/EBU Self-Powered Speaker System

Rear Panel:

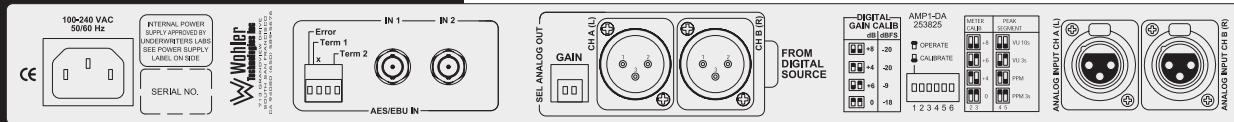

System Diagram:

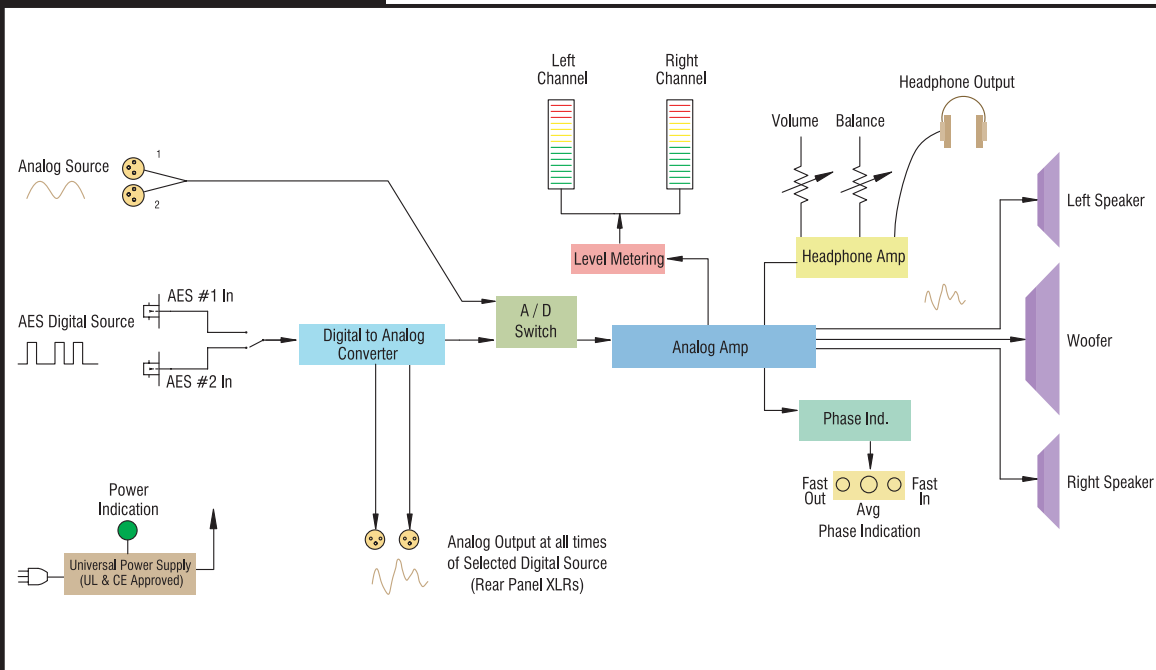

Specifications:

Analog input 2 balanced analog inputs, XLR
AES/EBU input 2 unbalanced AES/EBU inputs, BNC
Analog output balanced analog output of selected digital pair, XLR
Level meters 2 x 26 segment
Level meter scale +12 to -50 dB
Level meter threshold 0, +4, +6 or +8dBv - DIP switch selectable
Level meter dynamics Simultaneous VU & PPM
Midscale resolution2dB
Peak acoustic output @ 2 feet 98dB SPL
Power output RMS each side (2 Ohms) - 5W, 7W peak RMS center WOOFER (4 Ohms) - 11W, 16W peak
Frequency response (1/6 octave) 80Hz - 20kHz (±5dB) (-10dB @ 50Hz, 22kHz)
Analog input impedance >40 kOhms balanced
AES/EBU input termination 75 Ohms unbalanced
AES/EBU input sampling rate 32-48kHz, auto-detecting
Hum and noise better than -68dB below full output
Electrical distortion <0.15% at any level below limit threshold
Acoustic distortion8% or less worst case frequencies above 180Hz including cabinet resonance, typically <2%
Magnetic shielding <0.5 gauss any adjacent surface
Power consumption (AVG. MAX.) 30W
Dimensions (HxWxD) 1.75 x 19 x 12" (44.5 x 483 x 305mm)
Weight 9.5lbs (4.3kg)
Power Supply 100 to 240VAC, 50/60Hz universal input CE and UL approved

All specifications are subject to improvement



Toll Free (US): 1-888-5-WOHLER Tel: (650) 589-5676 Fax: (650) 589-1355
713 Grandview Drive, South San Francisco, California 94080, USA
www.wohler.com • sales@wohler.com